



WESTERN ELECTRO - ACOUSTIC LABORATORY

A division of Veneklasen Associates, Inc.

T E S T I N G • C A L I B R A T I O N • R E S E A R C H

25132 Rye Canyon Loop Santa Clarita, California 91355 Tel: (661) 775-3741 Fax: (661) 775-3742 www.weal.com

SOUND ABSORPTION TEST REPORT NO. AB11-208

Pacific Albus EcoGrille (6 member) on 1.5" fiberglass duct liner
("E-400" mounting)

CLIENT: **9Wood**
999 South A Street
Springfield, OR 97477

Page 1 of 3
27 October 2011

TEST DATE: 26 October 2011

INTRODUCTION

The methods and procedures used for this test conform to the provisions and requirements of ASTM Procedure C 423-09a, *Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method*. Copies of the test standard are available at www.astm.org. The test chamber volume is 275 cubic meters. Western Electro-Acoustic Laboratory is accredited by the United States Department of Commerce, National Institute of Standards and Technology under the National Voluntary Accreditation Program (NVLAP) Lab Code 100256-0 for this test procedure. This test report relates only to the item(s) tested. This report must not be used to claim product certification, approval, or endorsement by WEAL, NVLAP, NIST or any agency of the federal government.

DESCRIPTION OF TEST SPECIMEN


The test specimen was a 9Wood 6 member Pacific Albus EcoGrille assembly. The specimen consisted of nine grilles, each of which was approximately 2.44 m (96 inches) by 305 mm (12 inches) by 41.3 mm (1-5/8 inches) thick. Each grille consisted of six 28.6 mm (1-1/8 inch) by 15.9 mm (5/8 inch) slats on edge with 34.9 mm (1-3/8 inch) spaces between them. The slats and spaces were maintained with 12.7 mm (1/2 inch) by 31.8 mm (1-1/4 inch) backer strips stapled to the back of the slats. The grilles were backed with nominal 38.1 mm (1-1/2 inch) thick 24.0 kg/m³ (1.5 lbs./ft³) density fiberglass duct liner. The specimen was placed in an E-400 mounting jig consisting of four wooden sides around the perimeter of the specimen. The duct liner sat on an angle aluminum grid with the scrim side down. The grilles sat on the duct liner such that the top of the grilles were flush with the top of the jig, 400 mm (15-3/4 inches) above the test chamber floor. Closed cell foam gaskets are used to provide an air tight seal between the chamber floor and the bottom of the jig. According to the manufacturer the specimen was:

Pacific Albus EcoGrille (6 member) on 1.5" fiberglass duct liner

The net dimensions of the assembly were 2.74 m (108 inches) by 2.44 m (96 inches) by 79.4 mm (3-1/8 inches) thick. The overall weight of the specimen was 34.0 kg (75 lbs.).

Test results are presented on the following page as well as the ASTM estimate of reproducibility, R, and repeatability, r, of the sound absorption coefficients of a specimen in a Type E-400 mounting.

Respectfully submitted,
Western Electro-Acoustic Laboratory

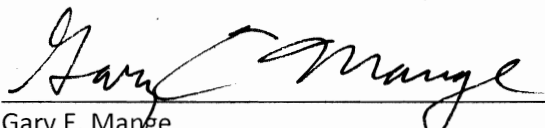
Gary E. Mange
Laboratory Manager

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory



NVLAP LAB CODE 100256-0

SOUND ABSORPTION TEST REPORT NO. AB11-208

TEST DATE: 26 October 2011

Page 2 of 3
27 October 2011

Mounting per ASTM E 795-00: Type E-400

Area tested: 72.0 ft² (6.69 m²)

Temperature: 76.3° F

Humidity: 42.4%

Pressure: 28.68 in. of Hg

TEST RESULTS

1/3 Octave Band Absorption Data


Frequency in Hz	Absorption in Sabins	Absorption Coefficients	Reproducibility R	Repeatability r
100	59.6	0.83	0.49	0.23
125	57.7	0.80	0.33	0.16
160	69.7	0.97	0.27	0.11
200	69.2	0.96	0.14	0.08
250	67.6	0.94	0.17	0.07
315	69.9	0.97	0.12	0.07
400	65.8	0.91	0.08	0.05
500	59.1	0.82	0.09	0.06
630	67.1	0.93	0.08	0.06
800	73.1	1.01	0.09	0.04
1000	68.7	0.95	0.09	0.03
1250	68.1	0.95	0.11	0.05
1600	70.0	0.97	0.13	0.04
2000	67.0	0.93	0.11	0.05
2500	66.1	0.92	0.09	0.04
3150	61.8	0.86	0.10	0.04
4000	57.2	0.79	0.10	0.07
5000	52.8	0.73	0.13	0.09

NRC 0.90
SAA 0.94

SOUND ABSORPTION TEST REPORT No. AB11-208

TEST DATE: 26 October 2011

Page 3 of 3
27 October 2011

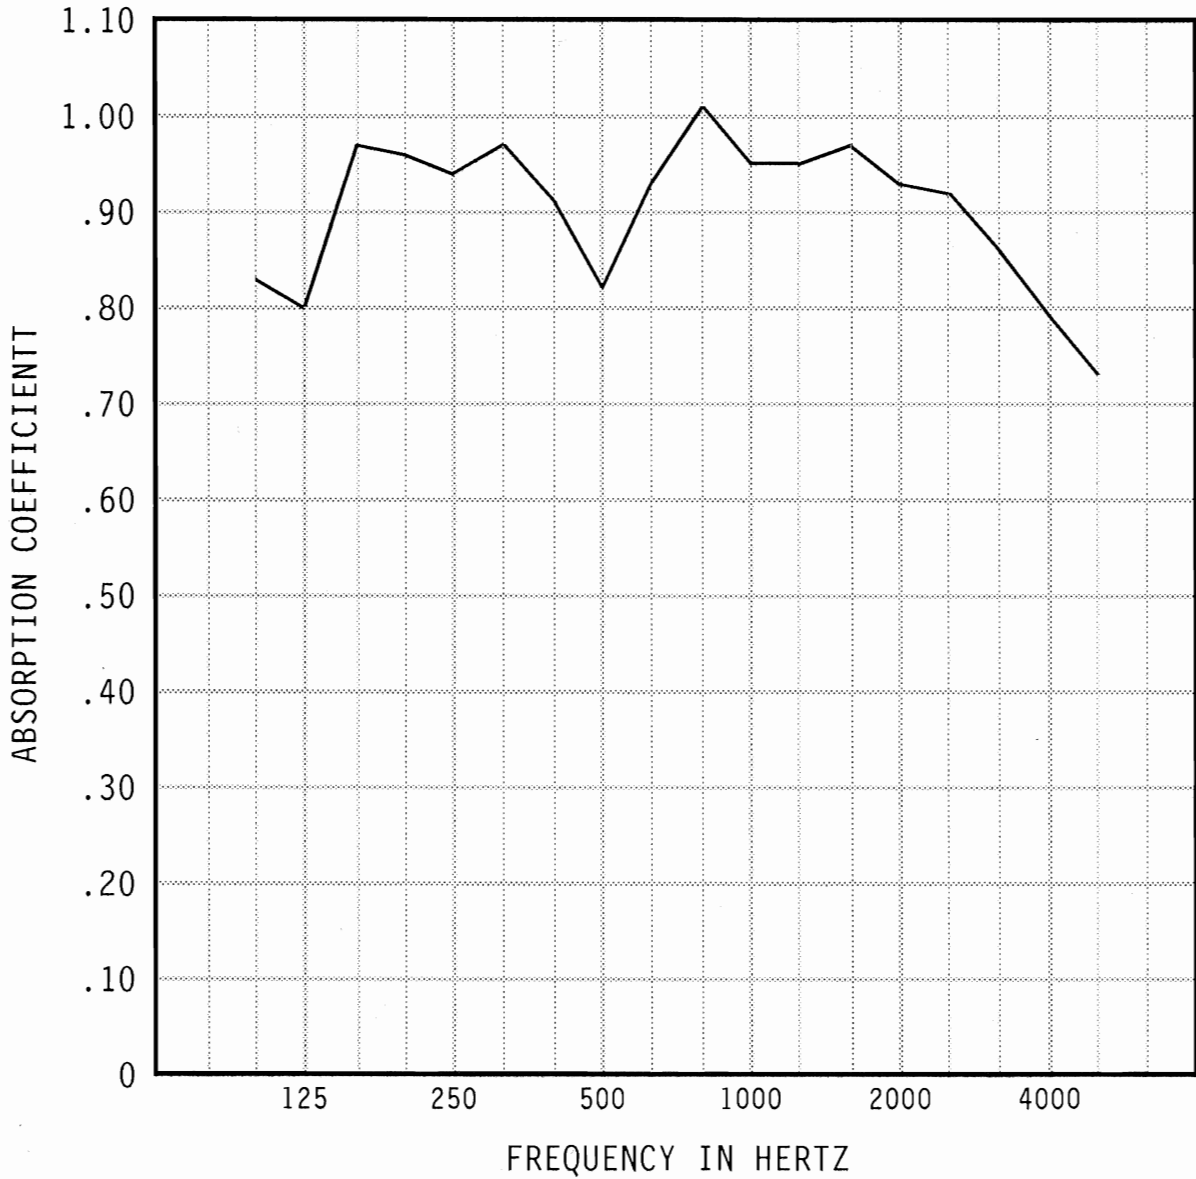

Specimen Area: 72 sq.ft.
Temperature: 76.3 deg. F
Relative Humidity: 42.4 %

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory

NVLAP[®]

NVLAP LAB CODE 100256-0