




2400 Data Sheet



SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR

Overview

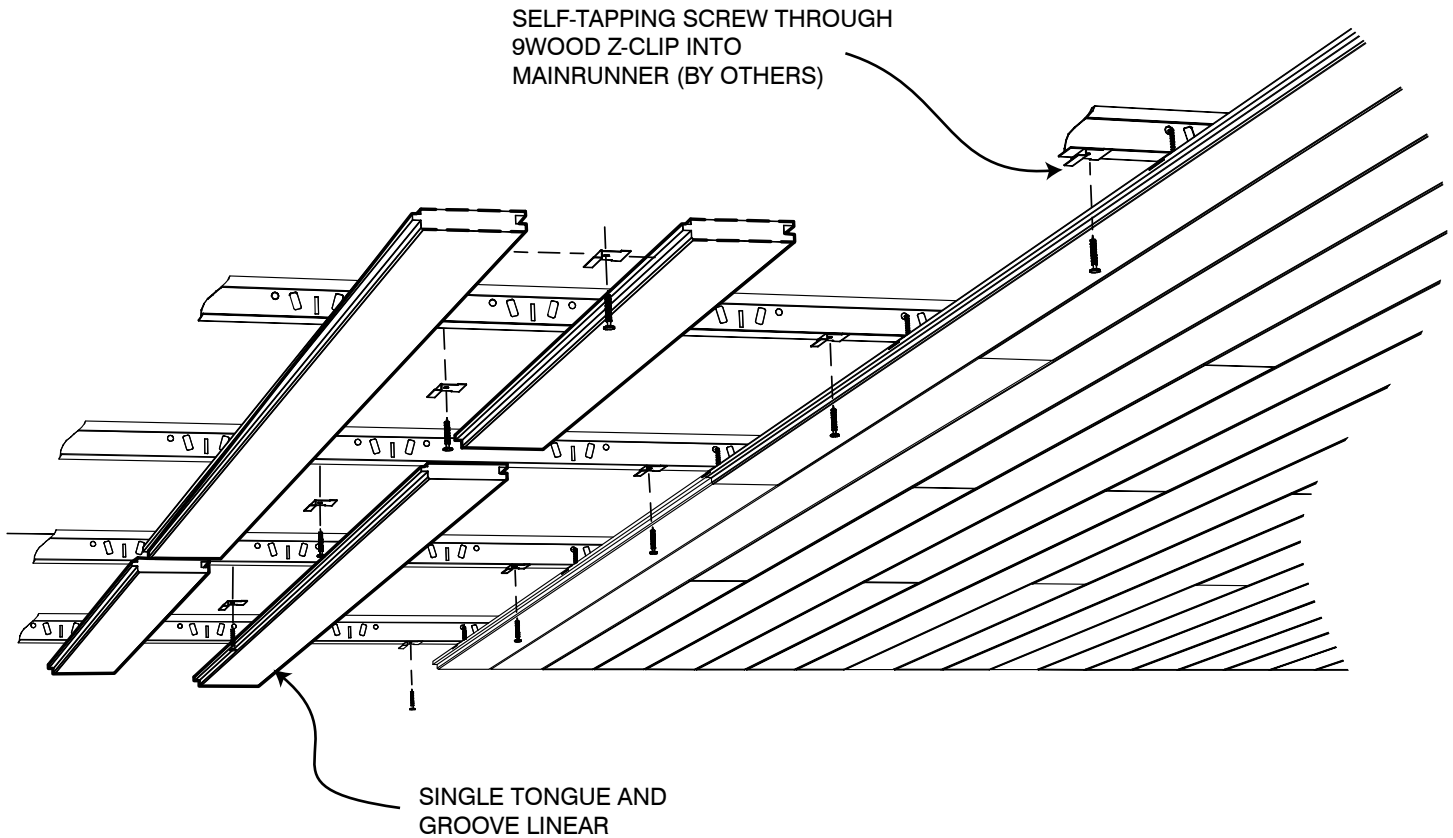

The **9Wood Tongue and Groove Linear** style wood ceiling offers the classic linear ceiling design where the individual wood members abut with a “V” groove accenting the edge-to-edge joint. Members are installed randomly to create a continuous look. Standard panel lengths are 4’, 6’, 8’, or 10’ (nominal) for solid wood.

Attachment for the Tongue and Groove Linear is via progressive install, utilizing the 9Wood, Inc. Z-Clip.



2400 Data Sheet



SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR

Product Data

Application

The Tongue and Groove Linear provides the classic “V” Groove closed reveal look and creates a continuous, monolithic ceiling field. Access can be through strategically located access panels or from room perimeters. Members are clipped to T-Bar main runners progressively.

Performance

Acclimatization

T & G Linears must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content. Should the building fall outside these limits consult 9Wood, Inc. for our 3 Tests/3 Tracks Acclimatization Advisory.

Acoustics

The T & G Linear is considered acoustically reflective.

Fire Rating

Individual members and components can be treated with Class I (A) Fire Retardant chemicals (solid wood use FR coatings, veneered particleboard use FR formulas). Particular species or styles have not been tested.

LEED

T & G Linears may qualify toward MR-3, MR-4.1/4.2, MR-5.1/5.2, MR-6, MR-7, IEQ-4.2 or IEQ-4.4. As all products are custom-fabricated, LEED credit opportunities are project by project. Please contact 9Wood, Inc. for specifics.

MEP

The T & G Linear permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diff users must be independently supported.

Seismic

Clips are typically mechanically screwed to T-Bar for seismic compliance. Please consult local code or a licensed engineer for any additional requirements.

Species & Finishes

9Wood can offer both domestic and imported species for the T & G Linear. Clear, satin sheen finish is standard; custom stain matches are available.

Suspension

T & G Linears are attached to 15/16” heavy duty T-Bar main runners via clips and screws. Main runners are typically 2' on center.

System Weight

T & G Linears typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.




2400 Data Sheet



SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR

Typical Specifications

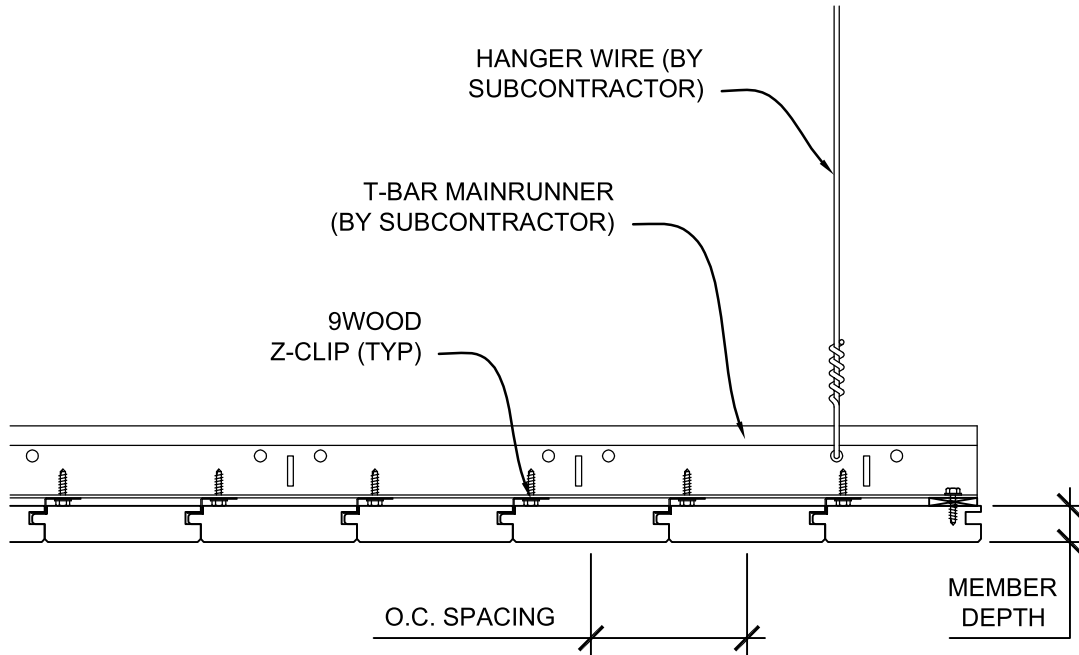

SKU Table

| Depth (Softwood) | Depth (Hardwood) | O.C. Spacing | Members per Linear Foot | | | | |
|------------------|------------------|--------------|-------------------------|---|---|---|---|
| | | | 2 | 3 | 4 | 5 | 6 |
| 5/8" | 3/4" | 3" | 2414-4 | | | | |
| 5/8" | 3/4" | 5" | 2416-2 | | | | |

* Other width, depth and M/LF combinations available. Please inquire.

** Please see 9wood.com for information on appropriate species selections.





2400 Data Sheet




SERIES: 2000 LINEAR WOOD

STYLE: 2400 TONGUE AND GROOVE LINEAR


Perimeter Conditions and Suspension

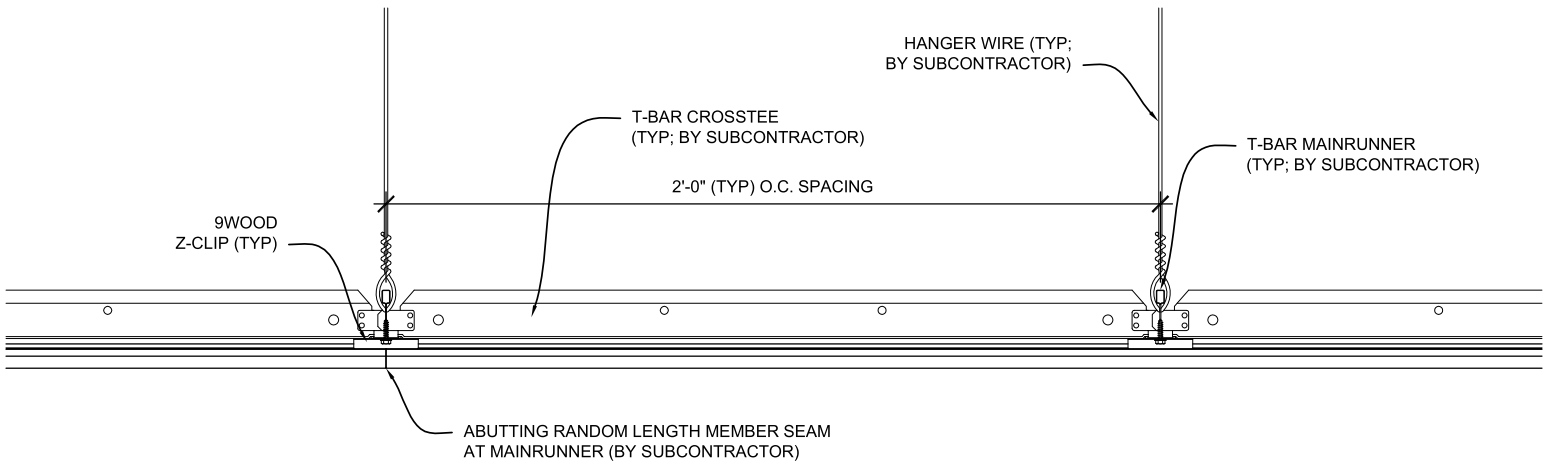


FLOATING OPEN REVEAL



METAL TRIM
SHADOW STYLE WALL ANGLE



METAL TRIM WALL ANGLE

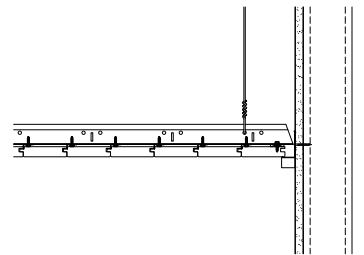

WALL ANGLE w/ WOOD TRIM