



WESTERN ELECTRO - ACOUSTIC LABORATORY

A division of Veneklasen Associates, Inc.

T E S T I N G • C A L I B R A T I O N • R E S E A R C H

25132 Rye Canyon Loop Santa Clarita, California 91355 Tel: (661) 775-3741 Fax: (661) 775-3742 www.weal.com

SOUND ABSORPTION TEST REPORT NO. AB10-180

Acoustic Planks SKU 3132-2 with 1.5mm Kerf Openings, 32 mm spacing over 1.5" Fiberglass
(Type "A" mounting)

CLIENT: **9Wood**
999 South A Street
Springfield, OR 97477

Page 1 of 3
31 August 2010

TEST DATE: 27 August 2010

INTRODUCTION

The methods and procedures used for this test conform to the provisions and requirements of ASTM Procedure C 423-08a, *Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method*. Copies of the test standard are available at www.astm.org. The test chamber volume is 275 cubic meters. Western Electro-Acoustic Laboratory is accredited by the United States Department of Commerce, National Institute of Standards and Technology under the National Voluntary Accreditation Program (NVLAP) Lab Code 100256-0 for this test procedure. This test report relates only to the item(s) tested. This report must not be used to claim product certification, approval, or endorsement by WEAL, NVLAP, NIST or any agency of the federal government.

DESCRIPTION OF TEST SPECIMEN

The test specimen was a 9Wood 3100 Acoustic Plank. Fourteen planks, approximately 19 mm (3/4 inch) thick by 200 mm (8 inches) wide by 2.44 m (8 feet) long were assembled over 38.1 mm (1.5 in.) of 32 kg/m³ (2 lb/ft³) fiberglass duct liner. One additional plank, 51 mm (2 inches) wide was used to complete the assembly. The planks were kerfed along the entire length of the plank (parallel to the grain) with 1.5 mm kerf openings on 32 mm centers. Each plank contained 25.4 mm (1 in.) by 159 mm (6.25 in.) oval acoustic dadoes filled with fiberglass pills on the backside of the plank. The duct liner board was laid directly on the test chamber floor with 1 x 2 furring strips running along the outside edges and down the middle. The planks were laid side by side on the 1 x 2 furring strips above, but also touching the fiberglass. The edges were covered with angle aluminum around the entire perimeter of the specimen and the angle aluminum was taped to the chamber floor around the entire perimeter. According to the manufacturer the specimen was:

Series 3100 SKU 3132-2 Acoustic Plank with a 2 lb/ft³ fiberglass duct liner backing

The net dimensions of the assembly were 2.74 m (108 inches) by 2.44 m (96 inches) by 57 mm (2-1/4 inch) thick. The overall weight of the specimen was 72.1 kg (159 lbs.).

Test results are presented on the following page as well as the ASTM estimate of reproducibility, R, and repeatability, r, of the sound absorption coefficients of a specimen in a Type A mounting.

Respectfully submitted,
Western Electro-Acoustic Laboratory


Gary E. Mange
Laboratory Manager

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory



NVLAP LAB CODE 100256-0

SOUND ABSORPTION TEST REPORT NO. AB10-180

TEST DATE: 27 August 2010

Page 2 of 3
31 August 2010

Mounting per ASTM E 795-00: Type A

Area tested: 72.0 ft² (6.69 m²)

Temperature: 79.7° F

Humidity: 42.5%

Pressure: 28.48 in. of Hg

TEST RESULTS

1/3 Octave Band Absorption Data


Frequency in Hz	Absorption in Sabins	Absorption Coefficients	Reproducibility R	Repeatability r
100	16.9	0.23	0.27	0.15
125	31.2	0.43	0.22	0.11
160	47.0	0.65	0.23	0.11
200	61.1	0.85	0.17	0.09
250	73.6	1.02	0.15	0.07
315	71.1	0.99	0.22	0.09
400	66.1	0.92	0.16	0.14
500	59.5	0.83	0.14	0.09
630	46.2	0.64	0.14	0.06
800	38.5	0.54	0.14	0.07
1000	29.2	0.41	0.12	0.06
1250	24.2	0.34	0.13	0.05
1600	20.6	0.29	0.14	0.05
2000	17.1	0.24	0.13	0.05
2500	14.3	0.20	0.14	0.06
3150	14.6	0.20	0.15	0.08
4000	14.0	0.19	0.16	0.11
5000	16.1	0.22	0.21	0.15

NRC 0.65
SAA 0.61

SOUND ABSORPTION TEST REPORT No. AB10-180

TEST DATE: 27 August 2010

Page 3 of 3
31 August 2010

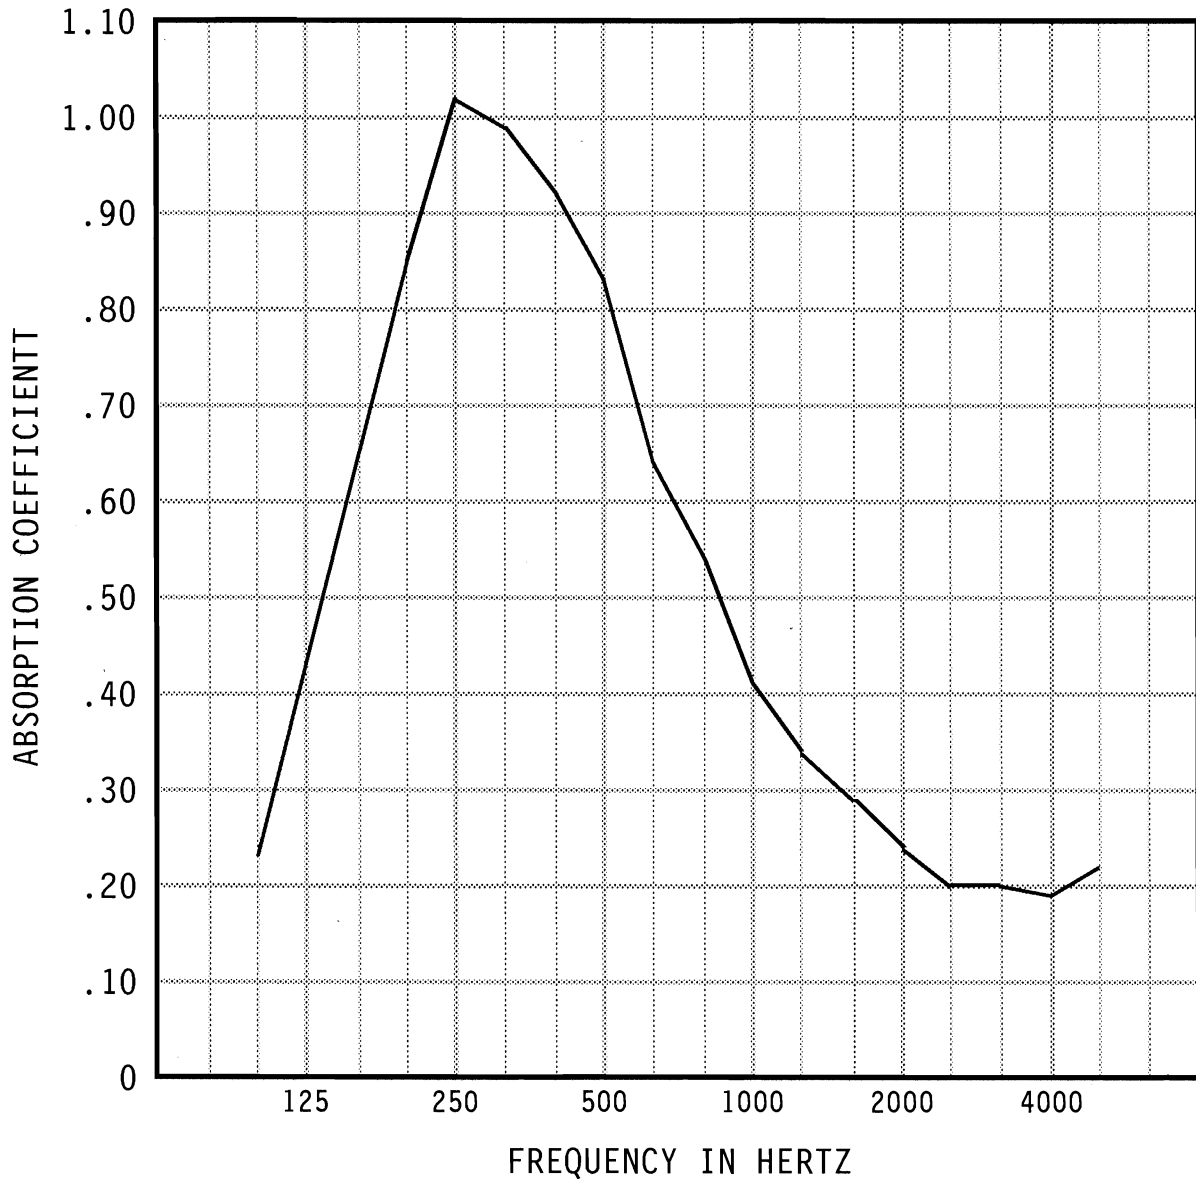

Specimen Area: 72 sq.ft.
Temperature: 79.7 deg. F
Relative Humidity: 42.5 %

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory



NVLAP LAB CODE 100256-0